


ARPJ-80350P (28W, 350mA, PFC)

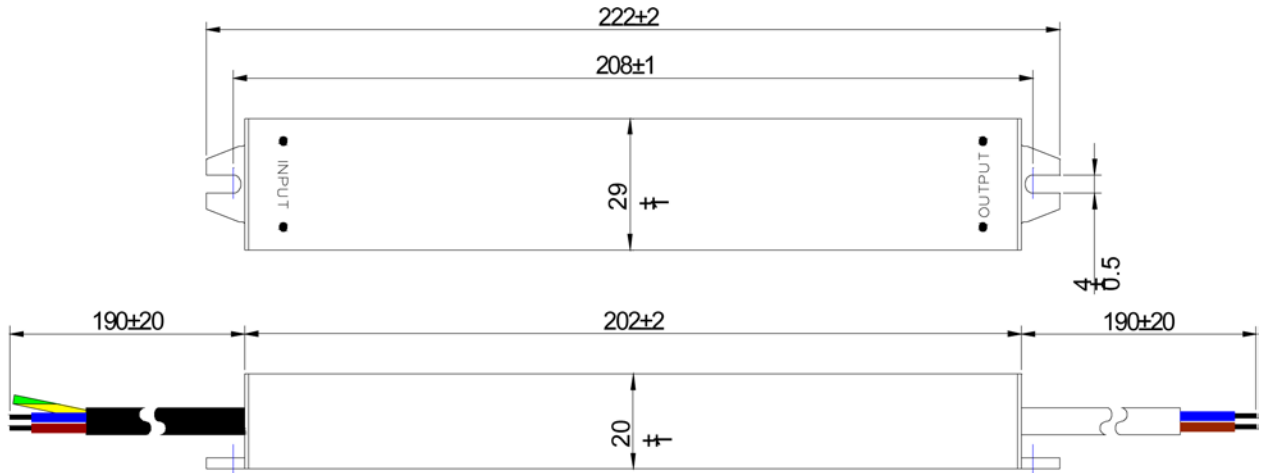

Parameter standard:

Certificate		CE
Based on		IEC 61347
Input	Rated voltage:	AC170~250V
	Frequency:	50/60Hz
	Input power(Loading):	≤38W
	PF:	≥0.9
Output	Output current (Loading):	DC 330mA±20mA
	Output voltage (loading):	DC 50~80V
	Output voltage(no loading):	DC≤85V
	Short-circuits protect:	Output shorted 3 seconds, and will work normally after separated.
	Over loading:	Protection
Voltage resistance	Input-Output	AC 1.5kV/3mA 5s
	Input-Housing	AC 1.5kV/3mA 5s
Nonfunction	External appearance	1. The surface has no dirty vestige, rowing the wreath oxygen, transform 2. Power cable and the label paper to should 3. The date print clear
	Mark	The product label is right clear, neat, have no folding line
	Other	Whether manual and other related data are well-found or not
Ripple		≤600mVpp (120Hz)
To an electric voltage		≤10Vac
Protection grade		IP67
Working Temperature		-25°C~+40°C

Feature testing:

Testing Contents		Testing Qty				
Input voltage:		AC220V				
Testing Qty		1	2	3	4	5
Input power (Loading voltage 80V)		30.4W	30.3W	30.3W	/	/
Output voltage (Loading voltage 80V)		0.319A	0.318A	0.317A	/	/
Output voltage (Loading current 0A)		84.11V	84.05V	84.51V	/	/
High low pressure start		OK	OK	OK	/	/
PF		0.916	0.912	0.922	/	/
Short-circuit:		OK	OK	OK	/	/
Bear the electric voltage	Input—Output:	OK	OK	OK	/	
	Input—Housing:	OK	OK	OK	/	
Over loading:		OK	OK	OK	/	/
Efficiency		83.9%	83.9%	83.7%	/	/
Verdict:		Pass				

- Housing Size (mm): L222×W29×H20
- Housing Material: AL
- Cable Model of input : VDE H03VV-F 3G0.75mm² black
- Cable Model of output: VDE H03VV-F 2*0.75mm² white
- Packing Size/Qty: 325×260×200mm/50/PCS